




# EASY 12

Digital 12 x 2.3 kW

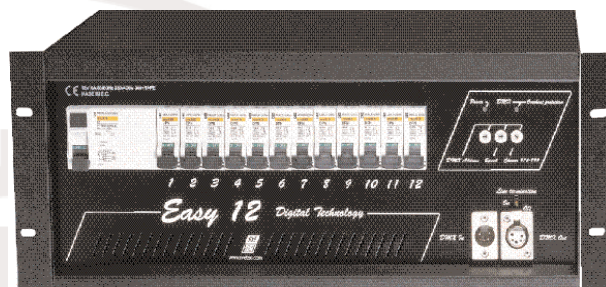

Easy 12 is a 12 x 2.3 kW digital dimmer, able to dim all light sources.

- Ease of use
- Rackable 19" or portable block
- Chasers and tests
- Instantaneous location and visualization of defects on the power supply network
- Professional grade filtering: 200  $\mu$ s
- High definition 32,000 steps
- Outputs on sockets
- Temperature control by microprocessor
- Integrated DMX termination
- Very competitive price

Easy 12 is the perfect dimmer for all applications, permanent or mobile, as stage, TV studio, touring, theatre, conference centre, museum, school, ...

## STENGER - TECHNIK - Ihr Partner für Licht!

**ING. STENGER** • ELEKTROTECHNISCHE UND BÜHNENBELEUCHTUNGSGERÄTE GES.M.B.H.  
Sebastianplatz 2  
A - 1030 Wien  
Tel.: +43 / 1 / 712 45 99 - 0  
Fax: +43 / 1 / 712 45 99 - 10  
Mail: [office@stenger-technik.com](mailto:office@stenger-technik.com)

[www.stenger-technik.com](http://www.stenger-technik.com)

## FEATURES

Patch	: Serial, first channel selection on address wheels
Curve	: Linear
Test	: All channels, by steps
Control signal	: DMX 512 on XLR 5
	: Last level held in case of signal interruption (configurable)
Animation	: 9 chasers with speed adjustment, selection by control wheel
Indicators	: LED power for power supply and signalisation of defect
	: LED DMX for the reception of digital signal (DMX 512) and information on temperature


## OPTIONS

- RCCD 30 mA
- MCB UNI + N
- Star-delta power
- EEC, Schuko, Swiss and HARTING connectors
- Racking kit

## TECHNICAL SPECIFICATIONS

Power rating	: 12 x 2.3 kW under 230 V	Environment	: Temperature : 0°C to + 40°C
Power supply	: Tri + N + GND, 230/400 V, 50/60 Hz on cable 5 x 6 mm <sup>2</sup>		: Humidity : 0 % to 90 %
Triac control	: Digital in all control cases	Protection degree	: Protection degree of enclosure = 30
Output sockets	: NF double 10/16 A, Schuko, Swiss	Cooling	: By fan regulation, RCS system with control by microprocessor
EMC compatibility	: According to EN 55014/60669 standards, disturbance suppression with strengthened attenuation	Weight	: 20 kg
		Size	: Width: 425 mm, Height: 177 mm (4 U), Depth = 360 mm
		Delivery with	: 1 carrying handle

## DESCRIPTION

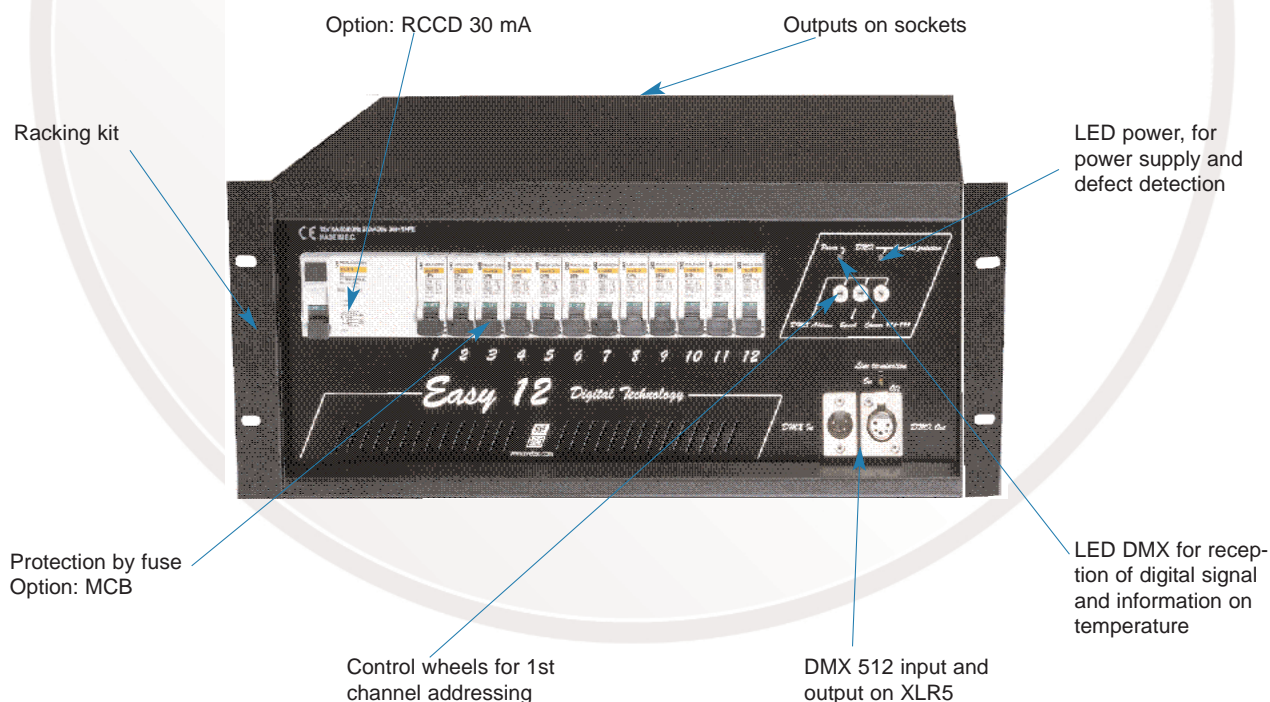

EC marked according to the EEC/89/336 and EEC/73/23 directives - Environment 1.

In conformity with C15-100 chapter 532.2.6.1, every device with output sockets must be protected by a RCCD 30 mA.

If the power supply of the Easy 12 has no this RCCD, the RCCD option becomes obligatory on this device.

This device is designed for working on private or public supply NF EN 50160 network.