




ZOOM PROFILE Z10 *Serenity*[®]

1000 / 1200 W 10/29°, 15/40°, 30/54°

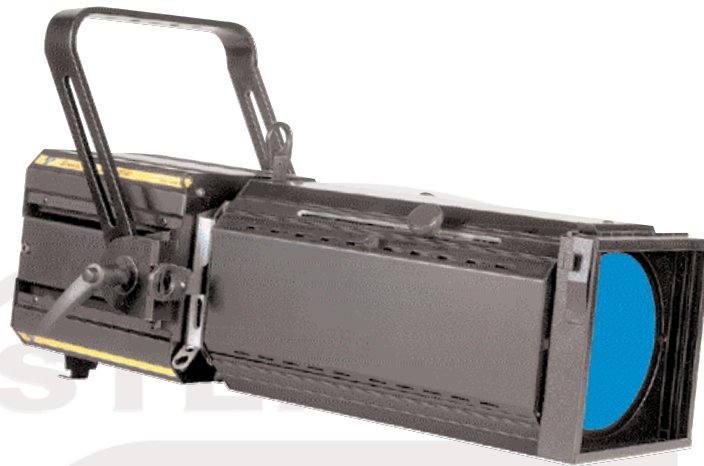

Serenity[®]

An original modularity

An exceptional light

Easy to handle

Maintenance as simple as possible

***Once you've tried the Zoom Profile Serenity[®],
you will never look at any other product !***

Innovative design

- Interchangeable lamp housings or zooms
- Reinforced aluminum body shaped for easy transport and storage
- Unique yoke design to provide outstanding stability on the ground (option)
- Easy position changing with quick locking handle requiring little effort
- Easily set for right hand/left hand handling
- Compatible with most brands of accessories

An exceptional quality of light

- Ceramic lamp socket designed for accurate lamp positioning
- Lense symmetric holder with composite guides to avoid lense vibrations
- RVE "Lightflex" dual condenser exclusive fixing system
- 360 degrees rotation with progressive locking
- Accurate lamp alignment from the outside of the fixture

Easy to handle

- "One hand" lamp changing
- Auto tightening shutters
- Shutters and gobo simultaneous mounting and focusing
- Easy cleaning of the optical unit with swivelling shutters
- Frosted glass holding with internal clips

STENGER - TECHNIK - Ihr Partner für Licht!

ING. STENGER • ELEKTROTECHNISCHE UND BÜHNENBELEUCHTUNGSGERÄTE GES.M.B.H.
Sebastianplatz 2
A - 1030 Wien
Tel.: +43 / 1 / 712 45 99 - 0
Fax: +43 / 1 / 712 45 99 - 10
Mail: office@stenger-technik.com

www.stenger-technik.com


SAFETY

Power supply disconnection at the opening
High temperature lamp housing power connector


PHOTOMETRIC DATA (lamp 230V, 3200°K, 1000W)

References	2789				2763				2793			
	a = 10°		a = 29°		a = 15°		a = 40°		a = 30°		a = 54°	
Distances	f	E lux	f	E lux	f	E lux	f	E lux	f	E lux	f	E lux
5 m	0,88	20078	2,50	2300	1,33	8890	3,45	1161	2,70	2750	4,65	935
10 m	1,75	5019	5,00	575	2,70	2222	6,90	290	5,35	705	9,30	235
15 m	2,60	2231	7,50	256	3,96	985	10,33	129	8,00	315	14,00	103

DESCRIPTION

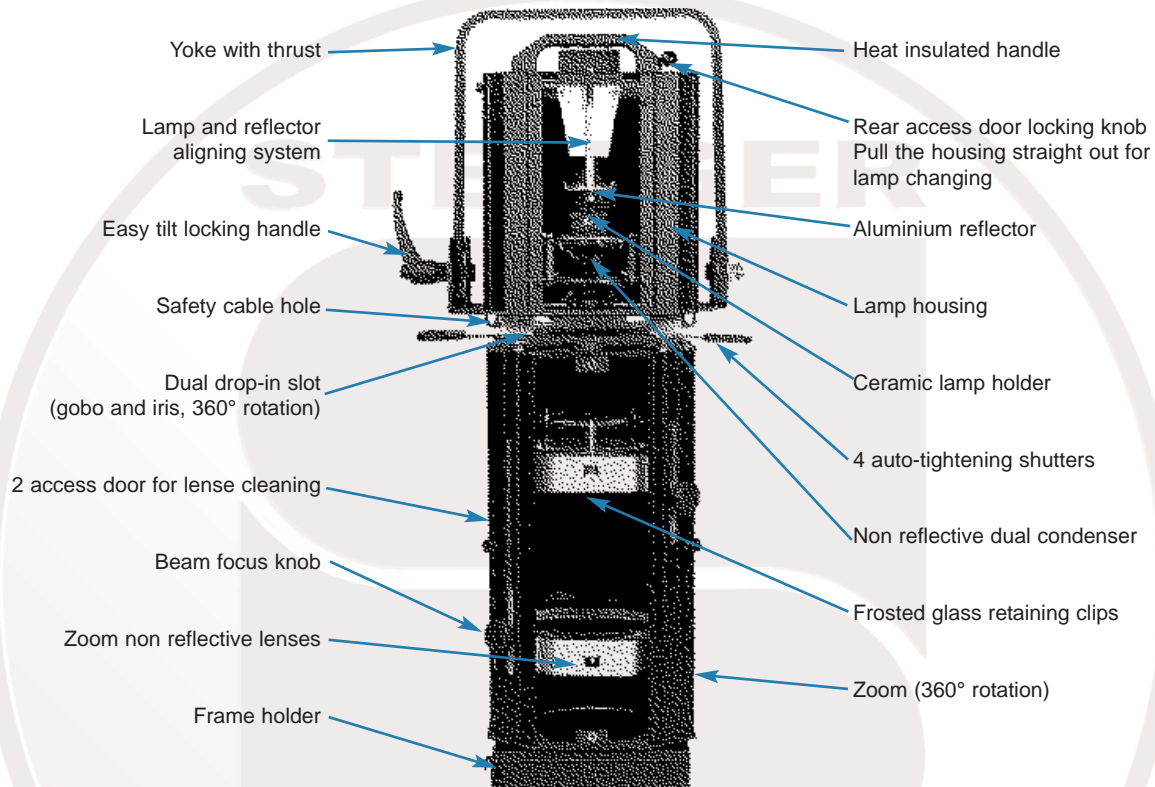

DIMENSIONS - WEIGHT

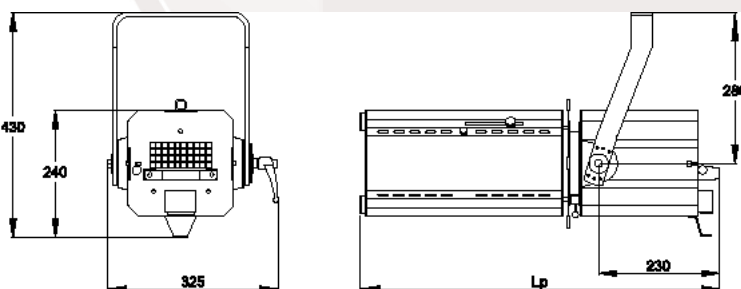

Whole spotlights			
Ref.	Zoom	Weight	Lenght L _p
2789	10/29°	11,8 kg	811 mm
2763	15/40°	11,5 kg	683 mm
2793	30/54°	10,5 kg	581 mm
Interchangeable Zooms			
2790	10/29°		
2766	15/40°		
2794	30/54°		

Serenity® and Lightflex® are registered trademarks of RVE Technologie S.A.- All models of Serenity® range are deposed by RVE Technologie S.A.
EC qualified according to European applicable deirectives

ACCESSORIES

Delivered accessories	Reference
Cable 1,50 m without connector	
Cardboard filterframe	2801
4 shutters	2807

Options	Reference
Metal filterframe	2802
Gobo holder A dimension	2803
Iris + holder	2804
Triple color frame holder	2805
Folding shutters	2806
Frosted glass	22846
20°special yoke	22644

ANRPR2748-FT1 01/05/05 RVE Technologie reserves the right to make any variation in design or construction to the equipment described without prior notification.